



Get in touch with MicroTouch.

DESKTOP SERIES





Medical-Grade Solution

MODEL NUMBER

DT-170P-M1

17" PCAP
HDMI/DP/VGA
IP65 Rated
DICOM Compliant



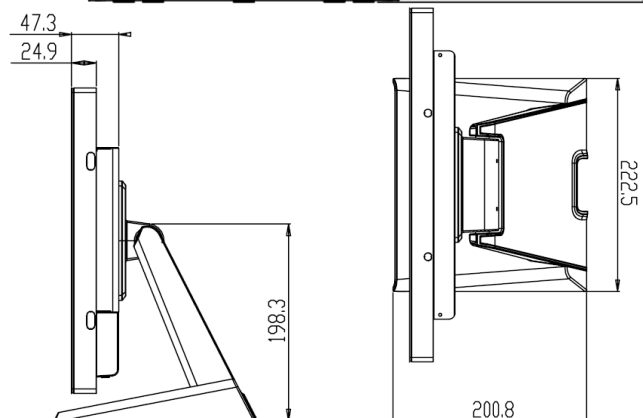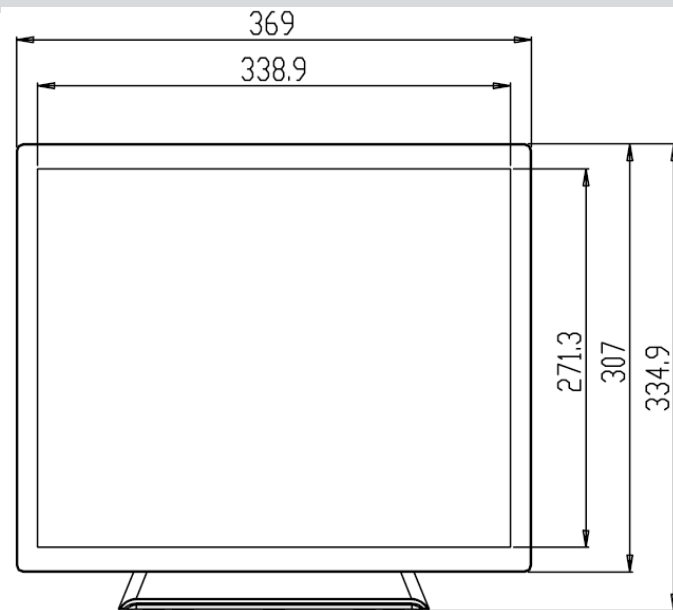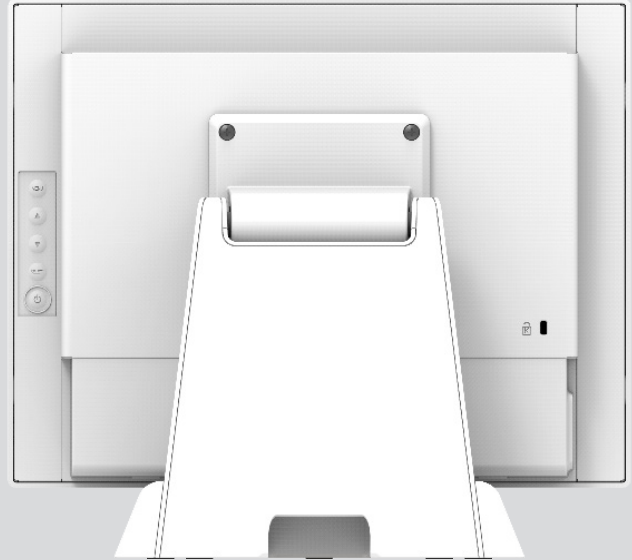

SPECIFICATIONS

Size	17" TFT LCD
Maximum Resolution	1280 x 1024
Aspect Ratio	5:4
Contrast Ratio	1000:1
Brightness	350 nits (No Touch), 297 nits (P-CAP)
View Angle	H:170°, V:160°

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
Screen Treatment	Anti-Glare

I/O Ports

Serial Port	1 x RJ11 (for remote key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI, 1 x DP
Audio Port	-
Power Input	1 x 2.1 mm 12V DC Jack

Color Calibration

Color Temperature	5500K / 6500K / 7500K / 9300K / User Definition
Gamma selection	Native / Gamma 1.8 / Gamma 2.2 / Dicom
Gamma LUT (bits)	10
Scaling Mode	Full / 5:4 / 4:3 / 16:9 / 1:1

Physical Properties

Power Supply	Medical External Power Adaptor 60W
Speaker	-
Housing Color	White
Construction	Glass, SECC Metal, Plastic (ABS)
Compliance	Front Panel IP65
Dimensions (W x H x D) mm	369.0 x 334.9 x 202.0
Net Weight (kg)	5.3
Gross Weight (kg)	7.3
Carton (W x H x D) mm	450.0 x 418.0 x 277.0
VESA	100 x 100 mm
Ball Drop	IK07

Safety

Certifications	CE, CB, FCC, UL, CCC, RoHS, IEC60601-1-2 4th edition compliant
----------------	--

Environment

Operating Temperature	0° C ~ 40° C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20° C ~ 60° C, 20% ~ 90% RH. Non-Condensing

Optional Peripheral

N/A	
-----	--



The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability.
 MicroTouch™ Copyright © 2020 MicroTouch™ All rights reserved.

www.MicroTouch.com us.orders@microtouch.com