


# SK-150P-A1

## 15" PCAP 3-in-1 Touch Monitor

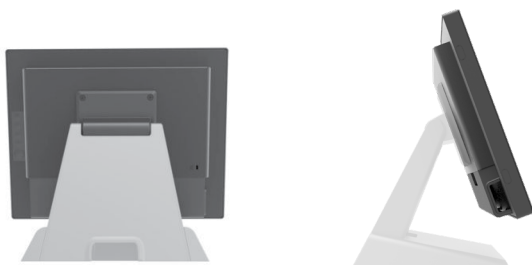


Stand sold separately  
**Part #IS-000-A1**

### Description

The SK-150P-A1 is a 15" standard format convertible monitor perfect for any industrial grade application, embedded or exposed, that requires quality and reliability in high use environments. Versatile by design, this 15" monitor fits a variety of applications with the ability to withstand harsh conditions while retaining high performance levels. The IP65 rating coupled with an updated I/O selection for seamless integration and OSD controls built into the back housing create a user experience that is effortless and simplistic.

### Featured Specifications

- Size: 15" TFT LCD
- Maximum Resolution: 1024 x 768
- Contrast Ratio: 800:1
- Aspect Ratio: 4:3
- Brightness: 350 nits (No Touch), 315 nits (P-CAP)
- View Angle: H: 160°, V: 150°
- Video Port: 1 x VGA (DB15), 1 x HDMI, 1x DP
- Warranty: 3 year

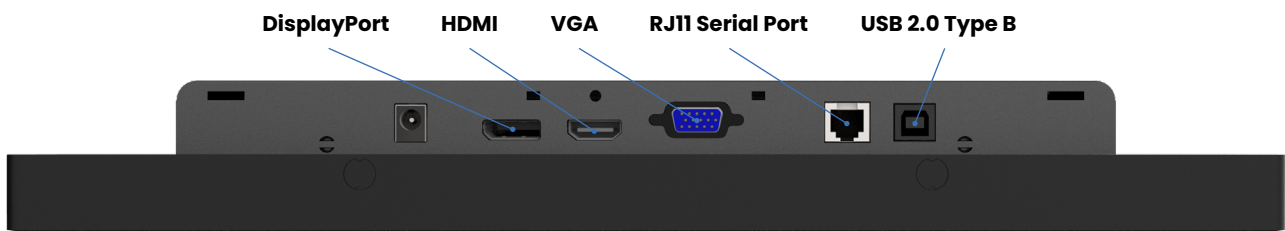

# Specifications

## Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)

## I/O Ports

Serial Port	1 x RJ11 Remote OSD
USB Port	1 x USB 2.0 (Type B) for Touch Interface
Video Port	1 x VGA (DB15), 1 x HDMI, 1x DP
Audio Port	–
Power Input	1 x 2.1 mm 12V DC Jack

## Physical Properties

Power Supply	Max. 60W (12V, 5A) External Power Adaptor
Speaker	–
Housing Color	Black
Construction	Glass, SECC Metal, Plastic (ABS)
Compliance	Front Panel IP65 Compliant, Rear IPX1
Dimensions (W x H x D) mm	337.4 x 265.4 x 44.3 mm
Net Weight (kg)	2.7 kg
Gross Weight (kg)	4 kg
Carton (W x H x D) mm	355 x 435 x 165 mm
VESA	100 x 100 mm
Ball Drop	–

## Safety

Certifications	CE/FCC/UL(62368)/CB (62368)/CCC
----------------	---------------------------------

## Environment

Operating Temperature	0° C ~ 40° C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20° C ~ 60° C, 10% ~ 90% RH. Non-Condensing

## Optional Peripheral

Industrial Stand	IS-000-A1 (Sold Separately)
Remote OSD	Rem11-A1 (Sold Separately)



[www.MicroTouch.com](http://www.MicroTouch.com) | [us.orders@microtouch.com](mailto:us.orders@microtouch.com)

MicroTouch Interactive, Inc.  
200 East Broadway Avenue, Maryville, TN 37804 | (616) 786-5353

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT21-1015 - 032425