



Get in touch with MicroTouch.



OPEN FRAME SERIES

MODEL NUMBER

OF-150S-B1

15" Open Frame
Bezel Versatility
Durable
Surface Capacitive



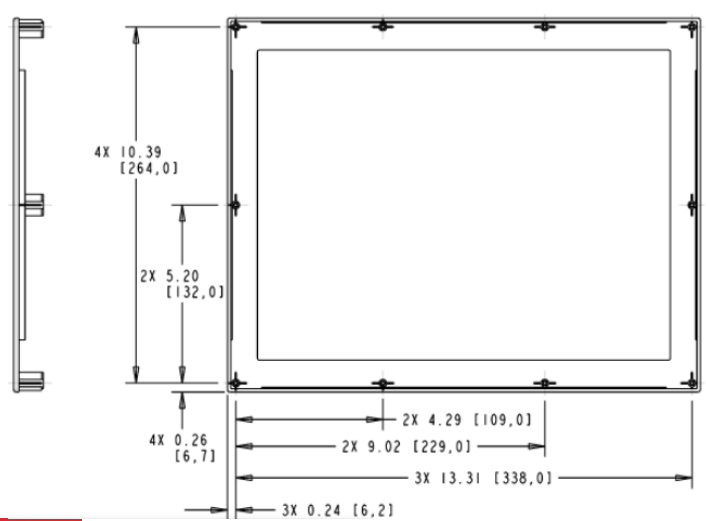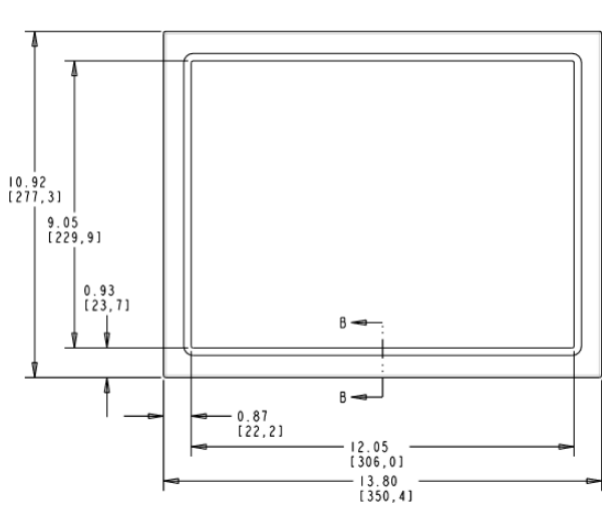

SPECIFICATIONS

Size	15" TFT LCD
Maximum Resolution	1024 x 768
Aspect Ratio	4:3
Contrast Ratio	500:1
Brightness	250 nits (No Touch), 225 nits (P-CAP)

Touch LCD Display	
Touch Screen	Surface Capacitive
Touch Points	Single Touch
Touch Screen Interface	USB (11-71315-225-01 B1) or Serial (11-71315-227-01 B2)



I/O Ports	
Serial Port	1 x RJ45
USB Port	1 x USB Type B
Video Port	1 x 15 Pin D-Sub
Audio Port	-
Power Input	1 x 12V DC or 110/220V AC

Physical Properties	
Speaker	-
Housing Color	Silver
Construction	Glass, Plastic (ABS), SECC Metal
Compliance	IP66/NEMA 4X (industrial bezel)
Dimensions (W x H x D) mm	350.4 x 277.3 x 50
Net Weight (kg)	4.2
Gross Weight (kg)	9.2
Carton (W x H x D) mm	445 x 381 x 165
VESA	75 x 75mm

Safety	
Certifications	FCC B, CE, UL/cUL

Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 90% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing

Optional Peripheral	
Industrial Bezel	IB-150-A1 (29368)
Contour Bezel	CB-150-A1 (29369)
RJ45 OSD Remote	REM45-A1

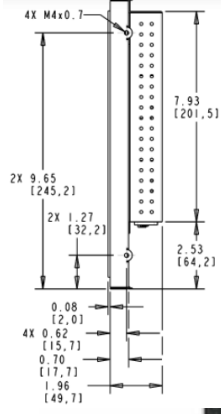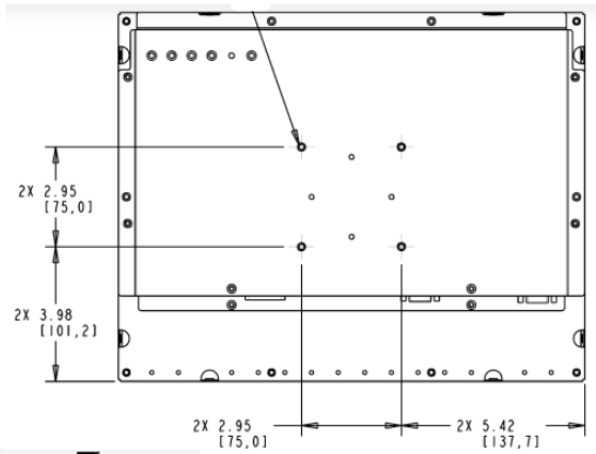

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability. MicroTouch™. | Copyright © 2020 MicroTouch™. All rights reserved.

www.MicroTouch.com us.orders@microtouch.com