



Get in touch with MicroTouch.



OPEN FRAME SERIES

MODEL NUMBER

OF-190P-A1



19" PCAP
VGA/DP/HDMI
IP65 Rated
Flush Mount Design



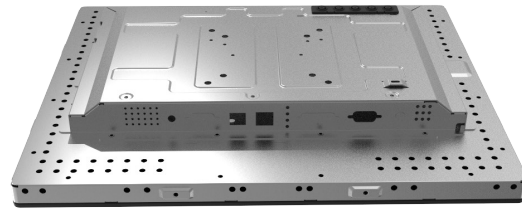

SPECIFICATIONS

Size	19" TFT LCD
Maximum Resolution	1280 x 1024
Aspect Ratio	5:4
Contrast Ratio	1000:1
Brightness	250 nits (No Touch), 215 nits (P-CAP)
View Angle	H:170°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
I/O Ports	
Serial Port	1 x RJ11
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI, 1x DP
Audio Port	-
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50W (12V, 4.16A) External Power Adaptor
Speaker	-
Housing Color	Dark Gray
Construction	Glass, SECC metal, Plastic (ABS)
Compliance	Front Panel IP65 Compliant, Rear IPX1
Dimensions (W x H x D) mm	432.9 x 360.3 x 58.4
Net Weight (kg)	5.8
Gross Weight (kg)	8.2
Carton (W x H x D) mm	525.0 x 460.0 x 165.0
VESA	75 x 75 mm, 100 x 100 mm
Ball Drop	-
Safety	
Certifications	CE/FCC/CB/UL
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
Optional Peripheral	
Remote Key	-

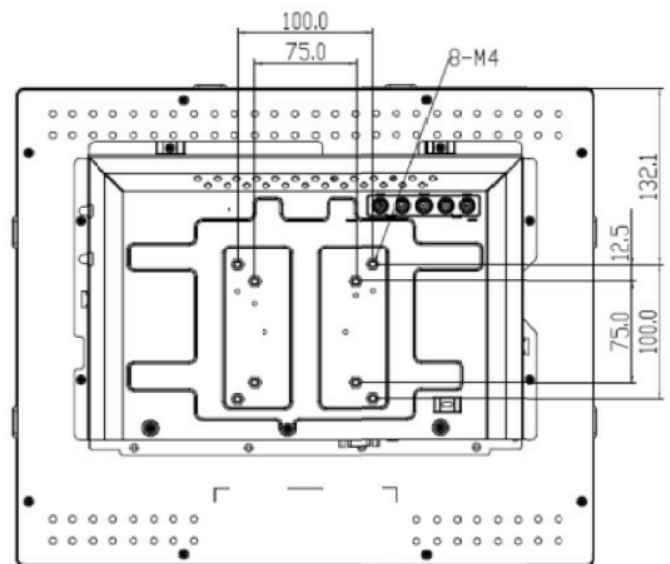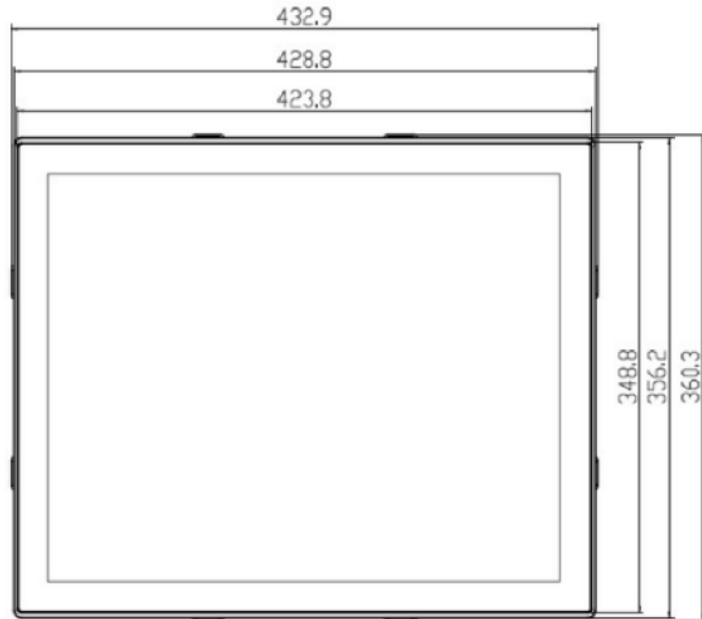

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability.
 MicroTouch™ Copyright © 2020 MicroTouch™ All rights reserved.

www.MicroTouch.com us.orders@microtouch.com