



Get in touch with MicroTouch.

DESKTOP SERIES

MODEL NUMBER

DT-215P-A1



21.5" PCAP
HDMI/DP/VGA/USB-C
Ultra Modern Design
Seamless Bezel





SPECIFICATIONS

Size	21.5" TFT LCD
Maximum Resolution	1920 x 1080
Aspect Ratio	16:9
Contrast Ratio	1000:1
Brightness	250 nits (No Touch), 225 nits (P-CAP)
View Angle	H:178°, V:178°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
I/O Ports	
Serial Port	1 x RJ11 (for Remote Key)
USB Port	1 x USB Type C (Alt Mode for DP video support)
Video Port	1 x VGA, 1 x DP, 1 x HDMI (up to 1920 x 1080 @60Hz)
Audio Port	1 x Audio-Input (3.5 mm Mini-Jack)
Power Input	1 x DC In 12V Jack Power Input
Physical Properties	
Power Supply	50W (12VDC/4.16A) External AC Power Adaptor (100VAC ~240VAC, 50/60Hz)
Speaker	2 x 2W
Housing Color	Black
Construction	Glass, Plastic (ABS), SECC Metal
Compliance	-
Dimensions (W x H x D) mm	510.96 x 308.01 x 37.9 mm (monitor only)
Net Weight (kg)	4.05 kg (monitor only)
Gross Weight (kg)	8.8 kg (monitor only)
Carton (W x H x D) mm	615 x 405 x 160 mm (monitor only)
VESA	100 x 100 mm
Ball Drop	-
Safety	
Certifications	CE, FCC, LVD, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
Optional Peripheral	
MSR	MSR-215-A1 (Sold Separately)
Camera	CAM-000-A1 (Sold Separately)
21.5" Slim Stand	SS-215-A1 (Sold Separately)

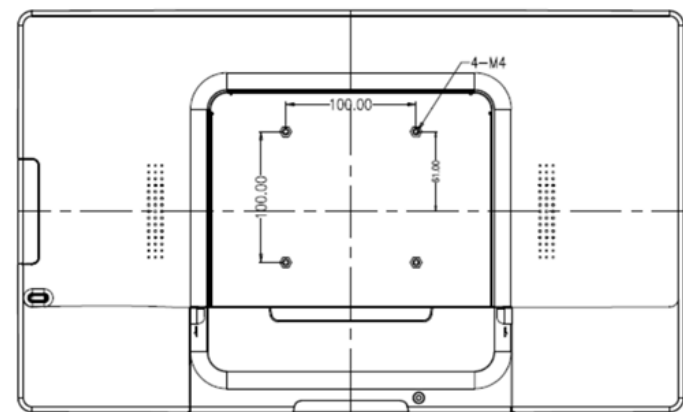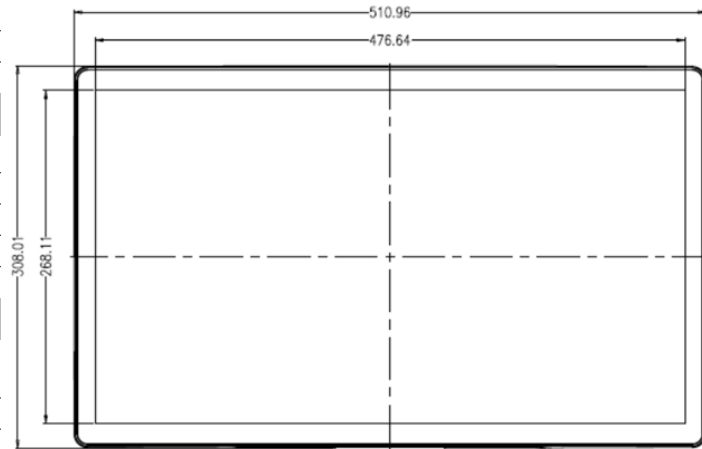

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability.
 MicroTouch™ Copyright © 2020 MicroTouch™ All rights reserved.

www.MicroTouch.com us.orders@microtouch.com