



Get in touch with MicroTouch.

DIGITAL SIGNAGE SERIES


MODEL NUMBER

DS-430P-A1



43" PCAP
HDMI/VGA/DP/DVI
40 Touch Points
Landscape/Portrait



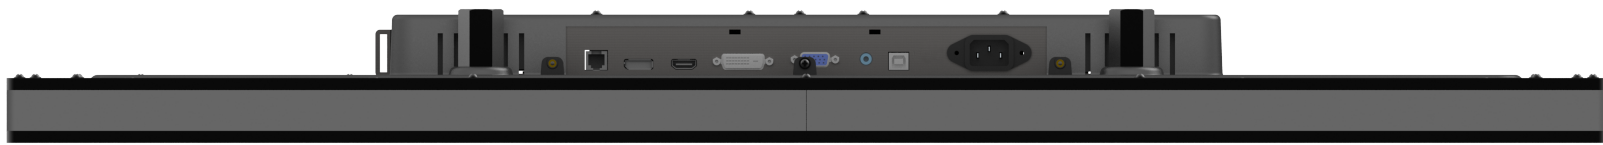

SPECIFICATIONS

Size	43" TFT LCD
Maximum Resolution	1920 x 1080
Aspect Ratio	16:9
Contrast Ratio	4000:1
Brightness	400 nits (w/o Touch), 328 nits (P-CAP)
View Angle	H:178°, V:178°

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	40
Touch Screen Interface	USB-HID (Type B)
Screen Treatment	Anti-Glare

I/O Ports

Serial Port	1x RJ11 (for Remote Key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI 1.3, 1 x DP 1.2, 1 x DVI
Audio Port	1 x audio in
Power Input	1 x AC Power Input
Power Output	5V/2.5A DC output

Physical Properties

Power Supply	AC Input 100~240VAC, 50~60Hz
Speaker	2 X 12W
Housing Color	Black
Construction	Glass, AL, Plastic (ABS)
Compliance	Front Panel IP65 Compliant
Dimensions (W x H x D) mm	983.2 X 571.4 X 82.3
Net Weight (kg)	19.5
Gross Weight (kg)	25.0
Carton (W x H x D) mm	1130x 710 x 190
VESA	400 x 400 mm
Ball Drop	IK08

Safety




Certifications	CE, FCC, UL/CUL, CCC, RoHS
----------------	----------------------------

Environment

Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 20% ~ 90% RH. Non-Condensing

Optional Peripheral

N/A	
-----	--

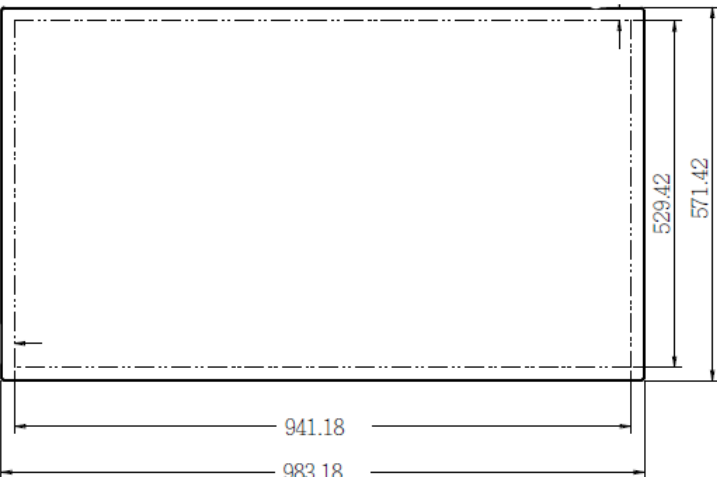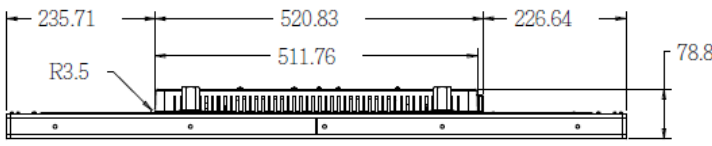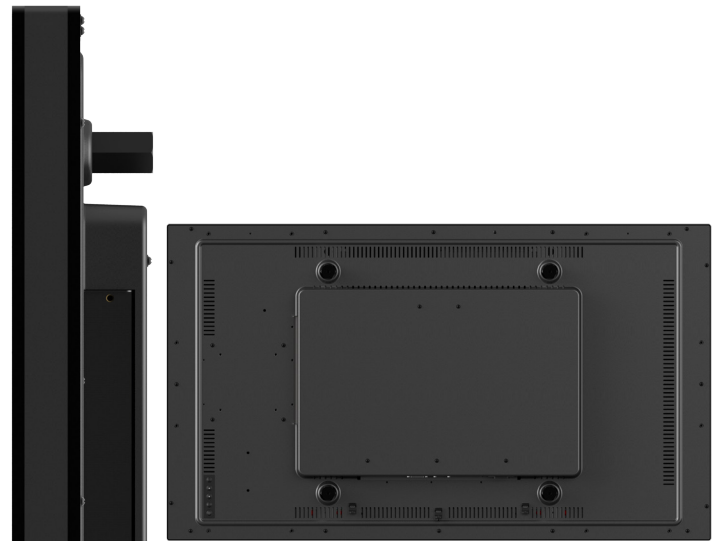

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability.
 MicroTouch™ Copyright © 2020 MicroTouch™ All rights reserved.

www.MicroTouch.com us.orders@microtouch.com