



Get in touch with MicroTouch.



DIGITAL SIGNAGE SERIES

MODEL NUMBER

DS-650P-P1

65" PCAP
HDMI/VGA/DVI/DP
80 Touch Points
Palm Rejection Enabled



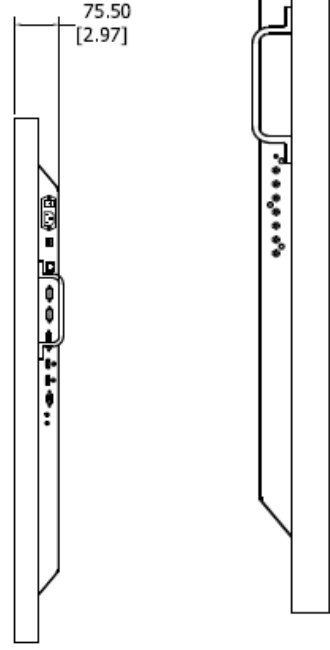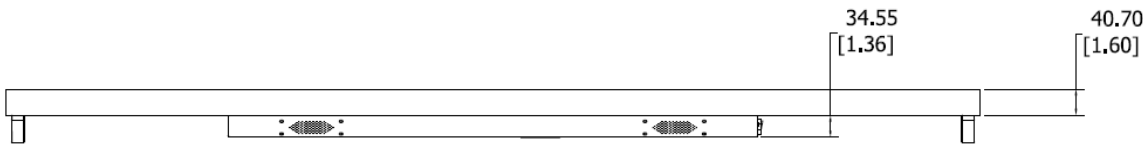

SPECIFICATIONS

Size	65" TFT LCD
Maximum Resolution	3840 x 2160
Aspect Ratio	16:9
Contrast Ratio	1200:1
Brightness	450 nits (w/o Touch), 390 nits (P-CAP)
View Angle	H:178°, V:178°

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	80 with Palm Rejection 10ms response (up to 20 touches)
Touch Screen Interface	USB
Screen Treatment	Anti-Glare

I/O Ports

Serial Port	-
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	HDMI, DVI, VGA, Display Port (HDCP)
Audio	Audio Input, 5W + 5W @ 8Ω
Power Input	Internal, 110/220 VAC

Physical Properties

Housing Color	Black
Dimensions (W x H x D) mm	1527.98 x 902.86 x 75.50
Net Weight (kg)	55.5
Gross Weight (kg)	68
Carton (W x H x D) mm	1720 x 1090 x 250
VESA	400x400

Safety



Certifications	FCC-B, CE, cTUVus, RCM, PSE, CB, CCC
EU Energy Efficiency Class	B

Environment

Operating Temperature	0° C ~ 40° C, 20% ~ 85% RH. Non-Condensing
Storage Temperature	-10° C ~ 60° C, 20% ~ 85% RH. Non-Condensing

Optional Peripheral

N/A

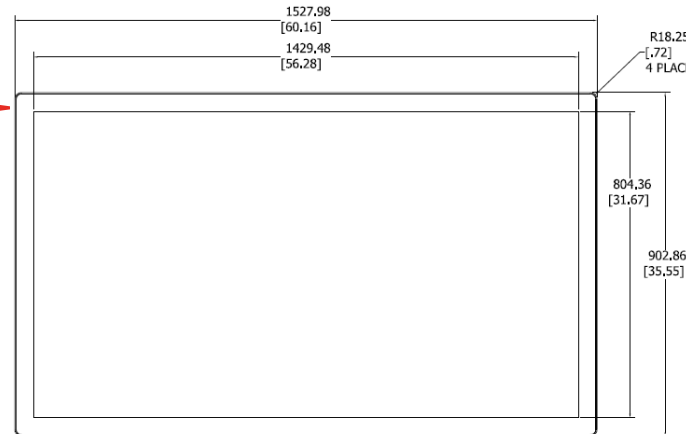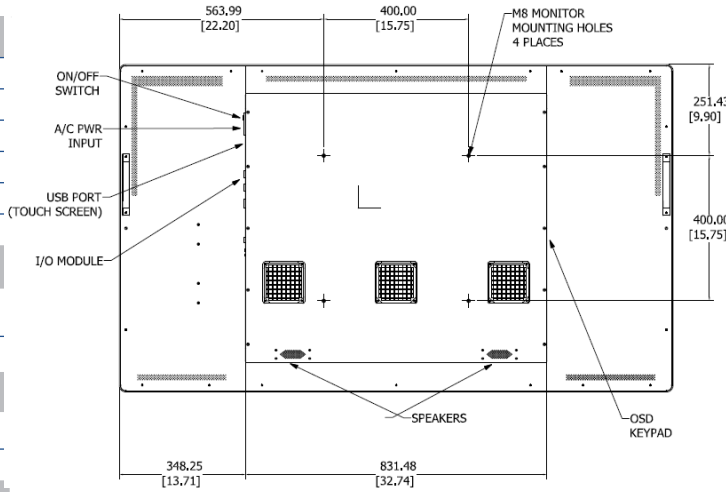

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability. MicroTouch™. | Copyright © 2020 MicroTouch™. All rights reserved.