

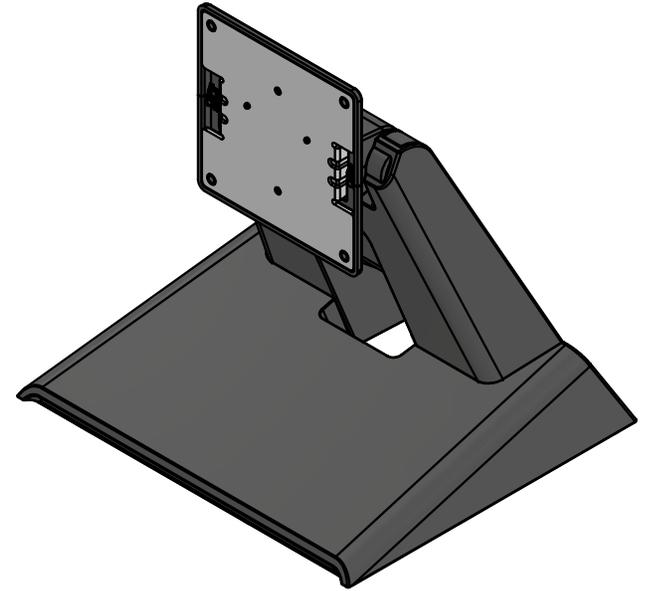


2

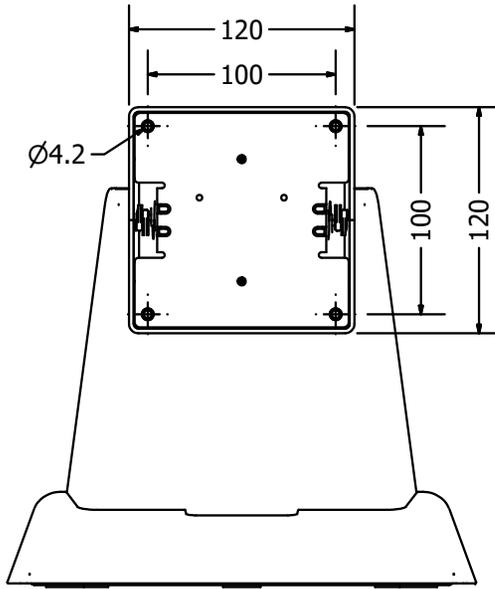


1

4.5
Distance added
to screw length

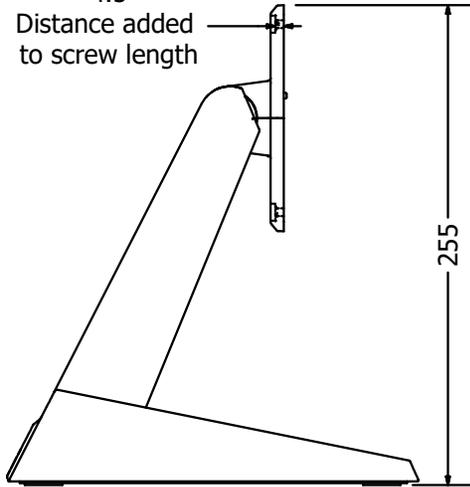

4X - 4.5mm Clearance hole for mounting
the stand screwed down to a table.

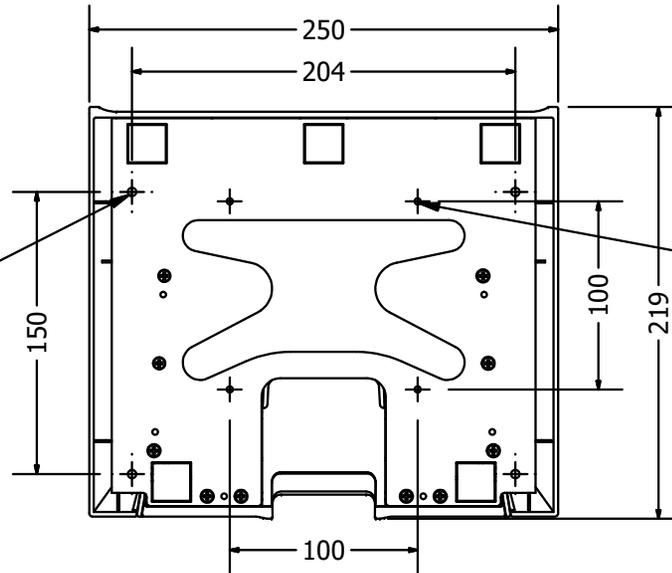

4X - M3 tapped hole for mounting
the stand screwed up through a table.

REV	DATE	DESCRIPTION	BY

THIS DRAWING AND OR TECHNICAL INFORMATION IS THE SOLE PROPERTY OF TES AMERICA, LLC. AND IS FURNISHED FOR AUTHORIZED USE ONLY AND ON THE UNDERSTANDING AND CONDITION THAT IT IS CONFIDENTIAL. NEITHER THIS DOCUMENT NOR THE INFORMATION DISCLOSED HEREIN SHALL BE DISCLOSED TO OTHERS, COPIED, REPRODUCED OR OTHERWISE TRANSFERRED TO OTHER DOCUMENTS, OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED BY TES AMERICA, LLC.

TOLERANCING
UNLESS OTHERWISE SPECIFIED
ALL DIMS ARE mm
.X ± 0.20 RADIUS ± 0.15
.XX ± 0.10 ANGLES ± 0.5°
DO NOT SCALE DRAWING

 HOLLAND, MI 49423 - USA

STAND KIT
IS-000_A1 (F82208212KIT)

DR: MPB	CK:	Material:	SCALE: NTS
DATE: 12/15/2023			SHEET: 1 OF 1
DWG. No.			VER. 01



2



1