


DT-100P-A1

10.1" PCAP Touch Monitor

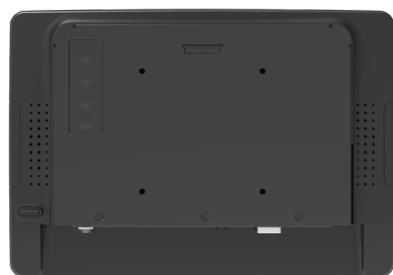


Description

The ultra-modern, unique zero bezel design and small footprint of the DT-100P-A1 makes it a one-stop-shop solution for a variety of applications. The versatile USB-C port with ALT DP mode, power delivery input, and touch acceptance eliminates the need to manage multiple cables enabling a seamless aesthetic while driving efficiencies during the installation process. This 10-point touch projected capacitive display with a 16:10 – 1280x800 resolution is designed to create a memorable touch experience for retail point-of-sale second displays, small form factor point-of-service, in-isle or end-isle interactive signage applications, and more. The seamless bezel, advanced PCAP technology and rounded aesthetic bridges the gap between daily consumer devices and commercial devices, a step towards commonality and memorable end-user experience.

Featured Specifications

- Size: 10.1" TFT LCD
- Maximum Resolution: 1280 x 800
- Contrast Ratio: 1000:1
- Aspect Ratio: 16:10
- Brightness: 350 nits (No Touch), 290 nits (P-CAP)
- View Angle: H:160°, V:160°
- Video Port: 1 x VGA, 1 x DP, 1 x HDMI
- Warranty: 3 year

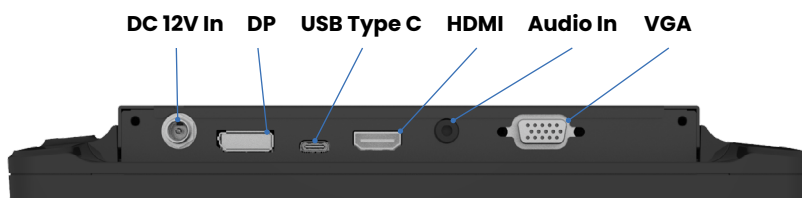

Specifications

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID
Display Surface	7H Hardness durable glass

I/O Ports

OSD Port	1 x RJ11
USB Port	1 x USB Type C (ALT Mode & PD Input)
Video Port	1 x VGA, 1 x DP, 1 x HDMI
Audio Port	1 x Audio-Input (3.5 mm Mini-Jack)
Power Input	1 x DC In 12V Jack Power Input

Physical Properties

Power Supply	36W (12V, 3A) External Power Adaptor
Speaker	2 x 2W Stereo
Housing Color	Black
Material	Plastic, Glass, SECC Metal
Dimensions (W x H x D) mm	245.4 x 170.5 x 30.3 mm (monitor only)
Net Weight (kg)	0.95 kg (monitor only)
Gross Weight (kg)	6.80 kg (5 units set) (monitor only)
Carton (W x H x D) mm	450 x 335 x 295 mm (monitor only)
VESA	75 x 75 mm

Safety

Certifications	CE, FCC, UL, CB, UKCA
----------------	-----------------------

Environment

Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing



www.MicroTouch.com | us.orders@microtouch.com

MicroTouch Interactive, Inc.
200 East Broadway Avenue, Maryville, TN 37804 | (616) 786-5353

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT22-1095 - 032425