


M1-550DS-A1

55" Digital Signage Touch Monitor

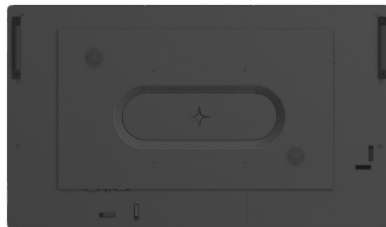


Description

The new M1-550DS-A1 55" interactive touch monitor is a newly designed solution for a variety of applications. Engineered with an improved airgap between the sensor and LCD, improving optical clarity, protection against dust and moisture build-up over time, while increasing touch accuracy. The M1-550DS-A1 features a premier anti-glare finish, driving better light dispersion and viewing performance in high ambient light applications. Supporting more than 40 touch points, multiple styli and erasers, this display is a drop-in solution for not only retail/hospitality signage and wayfinding, but collaboration applications as well. Combining the ultra-slim design, enhanced anti-glare finish, the versatile I/O selection, peak optical performance with 4k resolution, this display is a solution that can exceed wide range of application requirements.

Featured Specifications

- Size: 55" TFT LCD
- Maximum Resolution: 3840 x 2160
- Contrast Ratio: 1100:1
- Aspect Ratio: 16:9
- Brightness: 500 nits (No Touch), 450 nits (P-CAP)
- View Angle: H: 178°, V: 178°
- Video Port: 2 x HDMI/1 x DisplayPort/1 x VGA
- Warranty: 3 year

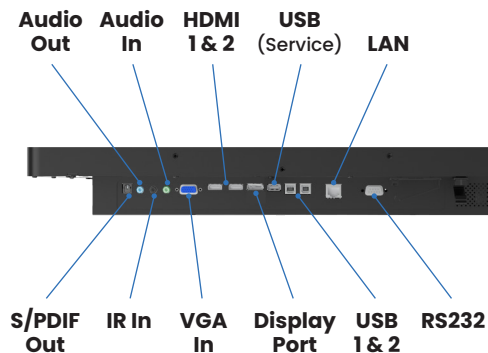

Specifications

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	>40 (with stylus support)
Touch Screen Interface	USB-HID (Type B)
Surface Treatment	Anti-Glare

I/O Ports

Serial Port	1x RS232 (DB9)
USB Port	2 x USB Type B (touch) 1 x USB 2.0 Type A
Video Port	2 x HDMI / 1 x DisplayPort / 1 x VGA
Audio Port	PC Audio in/out, SPDIF out
Power Input	AC Input 100~240Vac, 50~60Hz
Power Output	AC output IEC C13 type

Physical Properties

Power Supply	Max: 150W
Speaker	10W x 2
Housing Color	Black
Construction	Glass, SECC Metal
Compliance	IP65 – Front only
Dimensions (W x H x D) mm	1264.2 x 734.6 x 78.8 mm
Net Weight (kg)	34.7 kg
Gross Weight (kg)	43.5 kg
Carton (W x H x D) mm	1405 x 248 x 908 mm
VESA	300 x 300 mm
Ball Drop	IK06

Safety

Certifications	FCC/CE/UL/NOM/CEC/UKCA
----------------	------------------------

Environment

Operating Temperature	0°C ~ 40°C, 35% ~ 85%, RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 35% ~ 85% RH. Non-Condensing



www.MicroTouch.com | us.orders@microtouch.com
TES America, LLC | 215 Central Avenue, Holland, MI 49423 | (616) 786-5353