


M1-101DT-A2

10.1" Desktop Touch Monitor

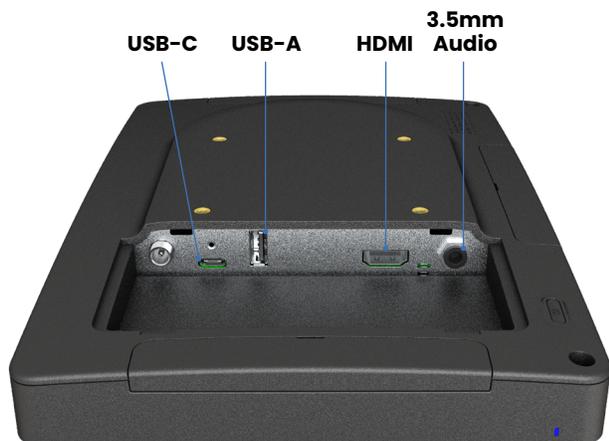

Description

The new M1-101DT-A2 10.1" desktop touch monitor is designed to bridge the gap between consumer aesthetics and the next generation of interactive commercial technologies. Engineered for durability and performance, the M1-101DT-A2 features an optically bonded touch screen. This drives industry leading optical clarity, picture quality and touch targeting while increasing durability. With our advanced etched anti-glare process, customers benefit from improved light dispersion and wear overtime. Ranging from bright retail environments to harsh industrial applications, this display has the versatility and performance that sets the standard. Featuring 3 x USB-C peripheral connections and a versatile I/O design, this display is a perfect fit for a variety of applications.

Featured Specifications

- Size: 10.1" TFT LCD
- Maximum Resolution: 1280 x 800
- Contrast Ratio: 1000:1
- Aspect Ratio: 16:10
- Brightness: 350 nits (No Touch), 290 nits (P-CAP)
- View Angle: H:160°, V:160°
- Video Port: HDMI, USB-C
- Warranty: 3 year

Specifications

Touch LCD Display

| | |
|------------------------|---------------------------|
| Touch Screen | Projected Capacitive |
| Touch Points | 10 |
| Touch Screen Interface | USB-HID |
| Display Surface | 7H Hardness durable glass |

I/O Ports

| | |
|-------------|--|
| USB Port | 1 x USB-C (ALT Mode for DP Video) 3 x USB-C (Peripheral Connection) 1 x USB-A 3.1 Type A |
| Video Port | HDMI, USB-C |
| Audio Port | 1 x Audio-Input (3.5 mm Mini-Jack) |
| Power Input | 1 x DC In 12V Jack Power Input |

Physical Properties

| | |
|------------------------|--|
| Power Supply | 36W (12V, 3A) External Power Adaptor |
| Speaker | 2 x 2W Stereo |
| Housing Color | Black |
| Material | Plastic, Glass, SECC Metal |
| Dimensions (W x H x D) | 255.8 x 169.4 x 34.5 mm (monitor only) |
| Net Weight | 0.95 kg (monitor only) |
| Gross Weight | 1 kg |
| Carton (W x H x D) | 320 x 265 x 120 mm |
| VESA | 75 x 75 mm |

Safety

| | |
|----------------|-----------------------|
| Certifications | CE, FCC, UL, CB, UKCA |
|----------------|-----------------------|

Environment

| | |
|-----------------------|--|
| Operating Temperature | 0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing |
| Storage Temperature | -20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing |

Optional Peripherals

| | |
|------------------|------------|
| MSR | MA-MSR-A1 |
| Camera | MA-CAM-A1 |
| Light Bar | MA-LBAR-A1 |
| Bar Code Scanner | MA-SCAN-A1 |



www.MicroTouch.com | us.orders@microtouch.com

MicroTouch Interactive, Inc.
200 East Broadway Avenue, Maryville, TN 37804 | (616) 786-5353

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT24-1194 - 032425