

DT-156P-B2

15.6" PCAP Touch Monitor




Stand sold separately
Part #SS-156-A1

Description

The ultra-modern, unique zero bezel and modular design of the DT-156P-B2 makes it a one-stop-shop solution with optional peripherals for added functionality. This 10-point touch, projected capacitive, Full HD 1920 x 1080 solution is great for retail point-of-sale or point-of-service with add-on features like 3 track MSR and a 2MP camera – two mounting locations, side and top. The seamless bezel, advanced PCAP technology and rounded aesthetic bridges the gap between daily consumer devices and commercial devices, a step towards commonality and memorable end-user experience.

Featured Specifications

- Size: 15.6" TFT LCD
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 1000:1
- Aspect Ratio: 16:9
- Brightness: 450 nits (No Touch), 405 nits (P-CAP)
- View Angle: H: 178°, V: 178°
- Video Port: 1 x VGA, 1 x DP, 1 x HDMI
- Warranty: 3 year

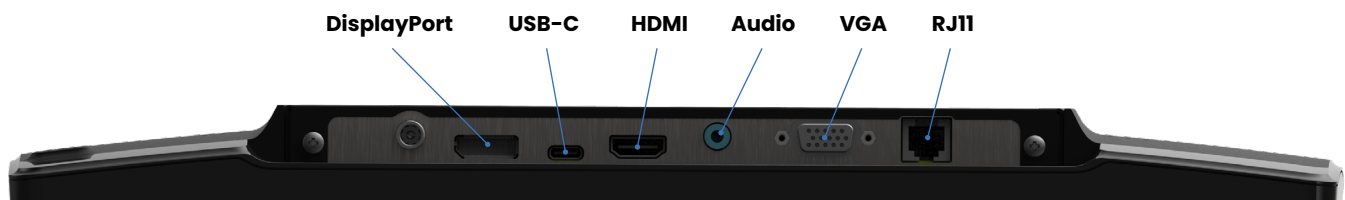

Specifications

Touch LCD Display

| | |
|------------------------|----------------------|
| Touch Screen | Projected Capacitive |
| Touch Points | 10 |
| Touch Screen Interface | USB-C |

I/O Ports

| | |
|-------------|---|
| Serial Port | 1 x RJ11 (for Remote Key) |
| USB Port | 1 x USB Type C (Alt Mode for DP video support) |
| Video Port | 1 x VGA, 1 x DP, 1 x HDMI (up to 1920 x 1080 @60Hz) |
| Audio Port | 1 x Audio-Input (3.5 mm Mini-Jack) |
| Power Input | 1 x DC In 12V Jack Power Input |

Physical Properties

| | |
|---------------------------|---|
| Power Supply | Max. 60W (12V, 5A) External Power Adaptor |
| Speaker | 2 x 2W |
| Housing Color | Black |
| Construction | Glass, Plastic (ABS), SECC Metal |
| Compliance | - |
| Dimensions (W x H x D) mm | 369.1 x 223.7 x 27.2 mm (monitor only) |
| Net Weight (kg) | 1.805 kg (monitor only) |
| Gross Weight (kg) | 2.80 kg (monitor only) |
| Carton (W x H x D) mm | 455 x 315 x 150 mm (monitor only) |
| VESA | 100 x 100 mm |
| Ball Drop | - |

Safety

| | |
|----------------|--------------------|
| Certifications | CE, FCC, LVD, RoHS |
|----------------|--------------------|

Environment

| | |
|-----------------------|--|
| Operating Temperature | 0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing |
| Storage Temperature | -20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing |

Optional Peripheral

| | |
|------------------|------------------------------|
| Camera | CAM-000-A1 (Sold Separately) |
| MSR | MSR-A1 (Sold Separately) |
| 15.6" Slim Stand | SS-156-A1 (Sold Separately) |



www.MicroTouch.com | us.orders@microtouch.com
215 Central Avenue, Holland, MI 49423 | (616) 786-5353